

### Features

- 0.5 gpm (1.9 lpm) maximum flow rate.
- Factory set 30 second max. continual run cycle.
- Vandal-resistant aerator.
- 24" (610 mm) flexible supply hoses for easy installation.
- 6-3/16" (157 mm) spout reach.
- Less drain.

### Material

- Brass construction.

### Technology

- Includes 30-year Hybrid Energy Cell.
- Electronic Insight™ Sensor Technology for accurate and consistent activation.

### Installation

- Single-hole mounting.
- Above-counter valve for easy installation and maintenance.

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Optional Products/Accessories

1160593 .35 gpm Aerator, Small  
 1139286 Small Aerated 1.0 gpm (3.8 l/min)  
 1139287 Small Laminar 1.0 gpm (3.8 l/min)  
 1053576 Small Aerated 1.5 gpm (5.7 l/min)  
 1053532 Small Laminar 1.5 gpm (5.7 l/min)  
 78783 Sealing Washer  
 K-7129 Drain  
 K-7129-A Drain  
 K-13478-A Escutcheon Plate  
 K-13478-B Escutcheon Plate  
 K-13479-A Escutcheon Plate  
 K-13479-B Escutcheon Plate



ADA CSA B651 OBC

### Codes/Standards



ASME A112.18.1/CSA B125.1  
 NSF/ANSI 372  
 All applicable US Federal and State material regulations  
 DOE - Energy Policy Act 1992  
 California Energy Commission (CEC)  
 ADA  
 ICC/ANSI A117.1  
 CSA B651  
 OBC


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color  | Code | Description        |
|--|------|--------------------|
|  | CP   | Polished Chrome    |
|  | VS   | Vibrant® Stainless |

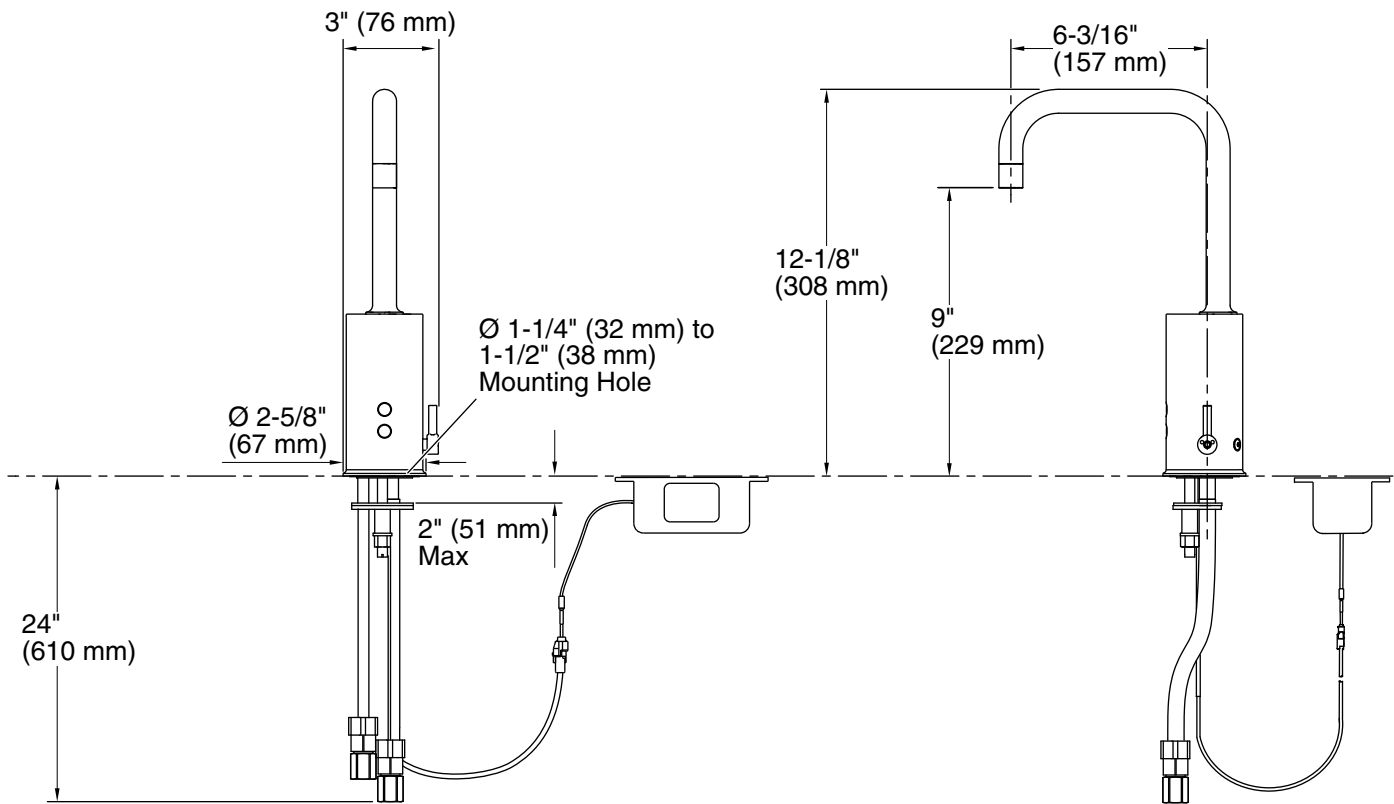

**Technical Information**

All product dimensions are nominal.

**Faucet:**

- Flow rate: 0.5 gal/min (1.9 l/min)
- Valve body: Machined-brass
- Drain included: No

**Notes**

- Install this product according to the installation guide.
- A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.
- The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.
- The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).
- The maximum height of the lip basin should be 3/4" (19 mm).
- Product includes rosebud spray aerator. Other aerator styles are available.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.